



# Opening 95° - For High Thickness Doors Ø40 Damping Hinge

## 寸35三代厚門95度內建油壓鉸鍊

- 門厚：20-30mm
- 另有精裝：寸35厚門+四孔底座(6分、3分、兩用、入柱)
- 材料：鋼
- 顏色：鍍鎳



### 三代厚門6分內建油壓95°

- Clip on
- Hole distance-52mm
- Overlay
- Damping
- Packing：1箱=100(PCS)

| D \ K | 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 | 11 | 12 | 13 | 14 | 15 |
|-------|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0     | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 |
| 2     | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 |
| 4     | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 |

$H = 17 + K - D$



### 三代厚門3分內建油壓95°

- Clip on
- Hole distance-52mm
- Half overlay
- Damping
- Packing：1箱=100(PCS)

| D \ K | 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 | 11 | 12 | 13 | 14 | 15 |
|-------|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0     | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 |
| 2     | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 |
| 4     | 8  | 9  | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |

$H = 9 + K - D$




### 三代厚門入柱內建油壓95°


- Clip on
- Hole distance-52mm
- Inset(tall crank)
- Damping
- Packing：1箱=100(PCS)

| A \ K | 3 | 4 | 5 |
|-------|---|---|---|
| 0     |   |   |   |
| 2     | 1 | 0 |   |
| 4     | 3 | 2 | 1 |


$H = A + K - 2$

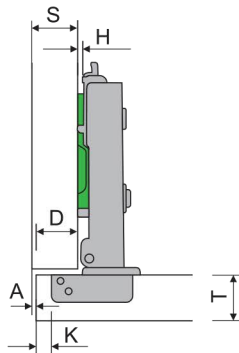

三代厚門6分

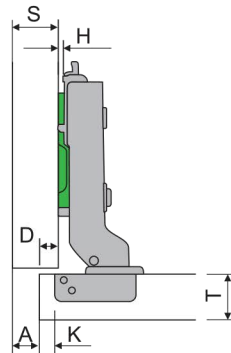

三代厚門3分

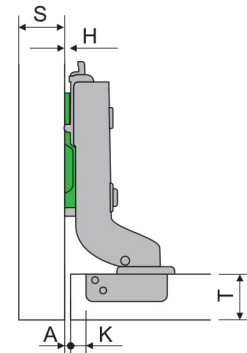

三代厚門入柱